


INTEGRATED PRE-CLEANER




ALL PRODUCTS USING

MAIZE THROUGHPUT till 100 t/h

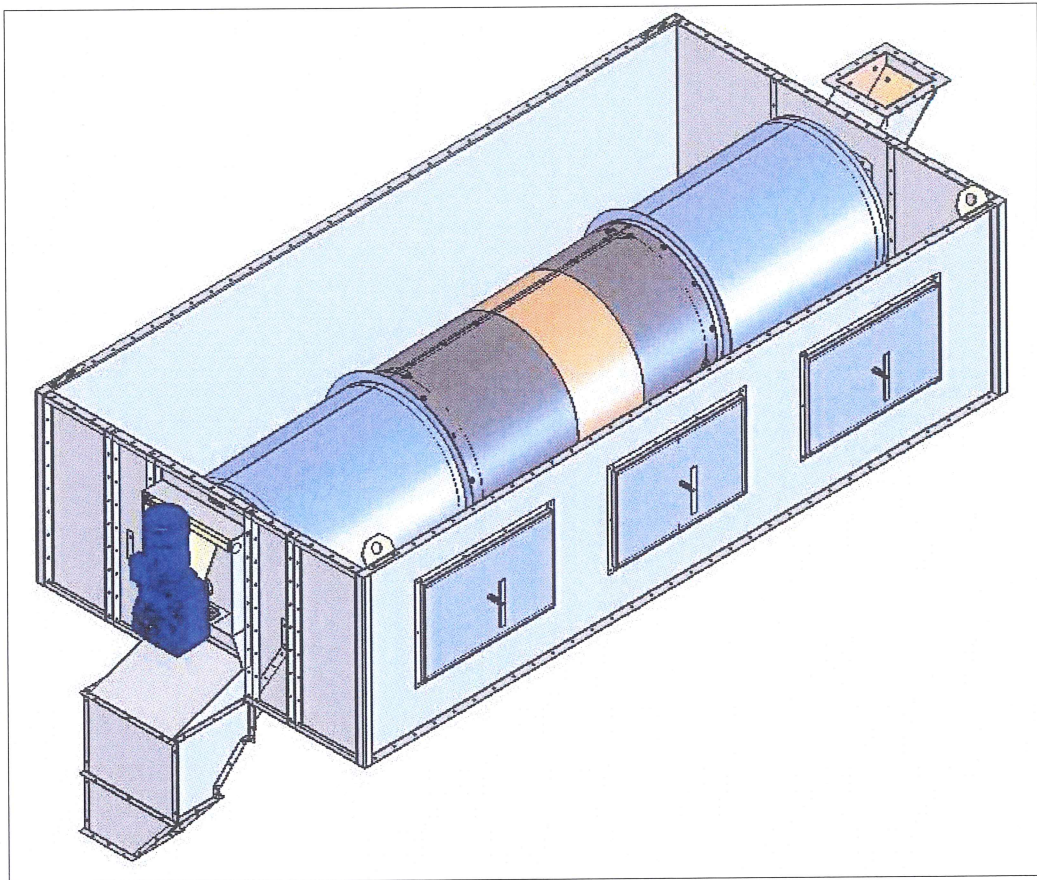

- * Adaptable on all existing or new LAW dryer sections
- * Dryer feeding on side, allowing a less high handling
- * Removing stainless screen with high perforation coefficient, separated with high flow good grains and large wastes
- * Centring of dryer filling under the screen realised by adjustable covers

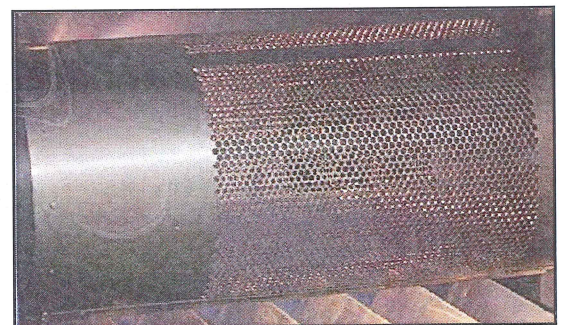




TECHNICAL CHARACTERISTIC

	SBC	SBC boarding	SBC NE	SBC NE boarding	SBCL	SBCL boarding	SBC LE	SBC LE boarding
PN	4010830	4010830	4010830	4010830	4010670	4010670	4010670	4010670
ROOF	Standard roof		4008325	4008325	Standard roof		97152	97152
LEVEL	4010648							


- Rotative drum \varnothing 805
- Motorisation power: 2,2 kW 230/400 V
- Net weight: 920 kg

Working principle

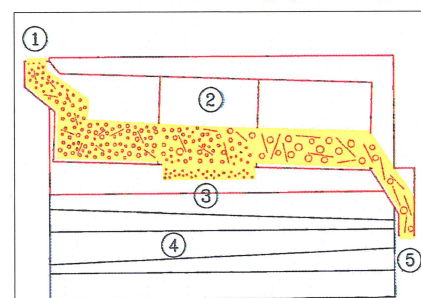

- 1 - Feeding
- 2 - Screen
- 3 - Good grain
- 4 - Reserve section
- 5 - Large wastes

DIMENSIONS

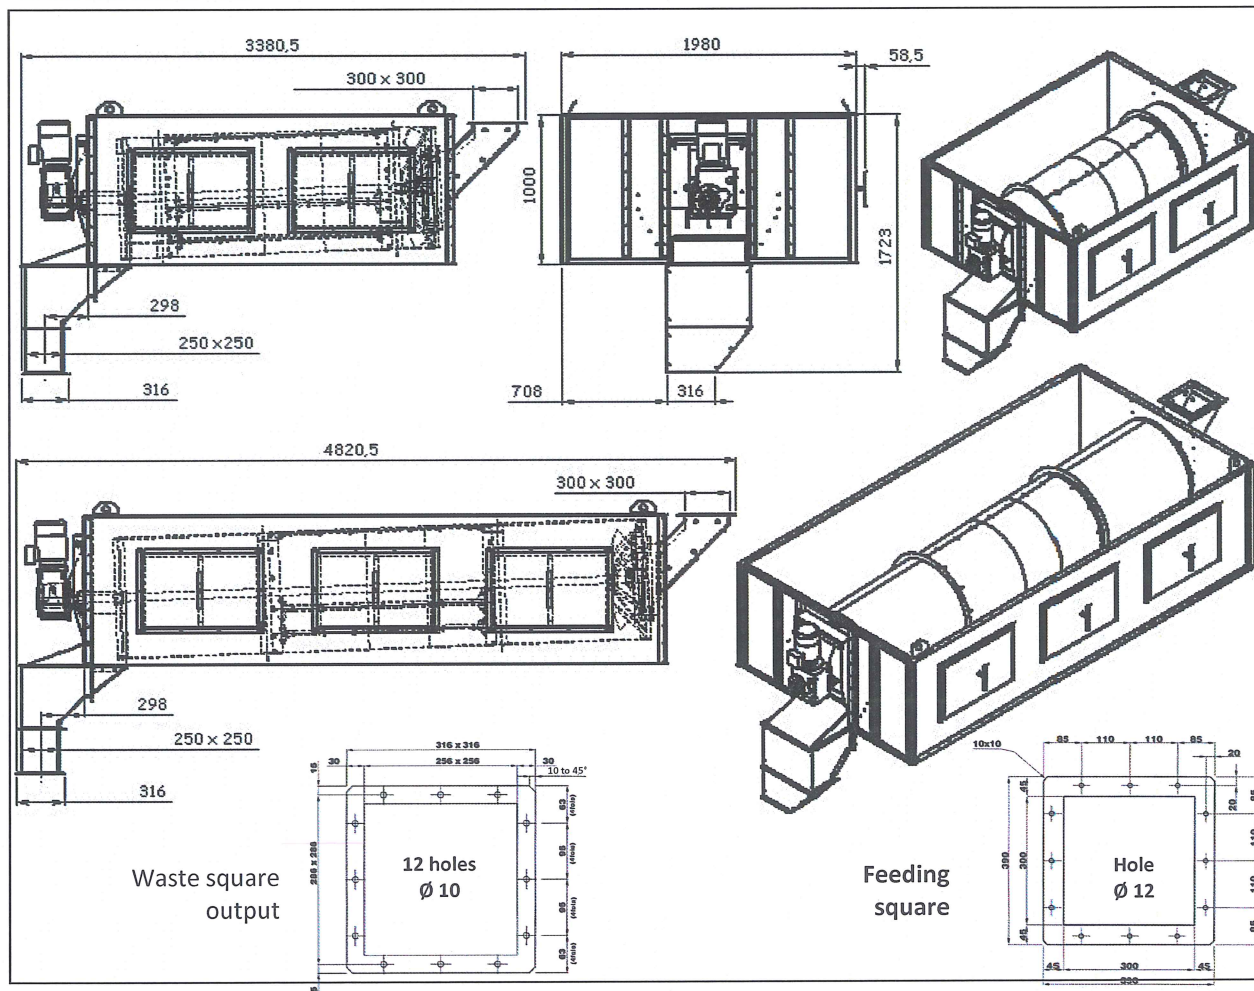

As we are constantly engaged in an effort to improve the quality and efficiency of our products, dimensions and specifications could change without notice