

# CLEANER GRADER Type EAC 153

**MAROT**<sup>®</sup>  
EMILE

**UNIVERSAL  
IN APPLICATION**

**EXAMPLE FOR WHEAT:**


Pre-cleaning : up to 20 t/h  
Cleaning : up to 15 t/h  
Grading : up to 2 t/h

**VIBRATION FREE OPERATION**



Patented  
in France and Overseas

- \* **Large intake hopper** ensuring optimum product distribution
- \* **Very powerful, adjustable aspiration system** operating on the grain entering the rotary drum
- \* **Large aspiration chamber** where the heavier and light trash are separated
- \* **Aspiration regulation system (patented)** enabling the aspiration power to be varied precisely without modifying the fan discharge power
- \* **A secondary aspiration system (patented)** absorbs the dust generated during screening operations
- \* **Efficient dust evacuation system**, constant regardless of aspiration setting
- \* **High precision grading**
- \* **Rotary drum** fitted with our patented system of spreader and scoop blades  
Speed adjustment in option
- \* **Removable screens** separating clean sample from light and heavier trash at high throughput rate
- \* **Efficient screen anti-blinding system**
- \* **Patented screen clamp** - Type NM (see photo below)

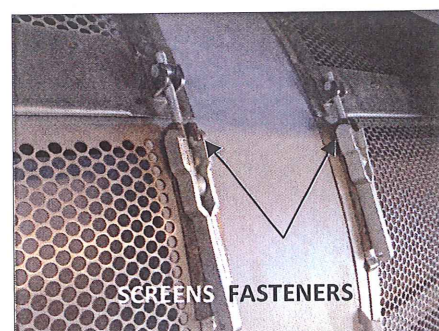

SCREENS FASTENERS







## TECHNICAL SPECIFICATION

- Reference EAC 153: 98796
- 630 mm diameter rotary drum with 3 screens (645 x 2000) to choice
- Motor with aspiration system: fan 2.2 kW
- Drum 1.1 kW
- Net weight: machine: 650 kg

## ATTACHMENTS and ACCESSORIES

Consult us

## DIMENSIONS - IT 722-12

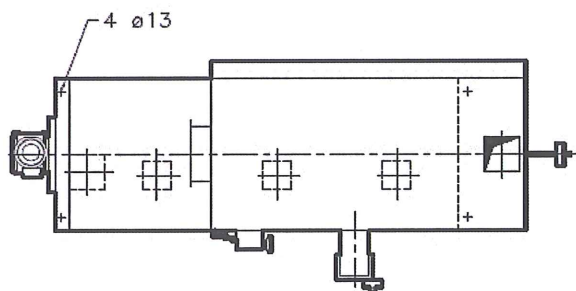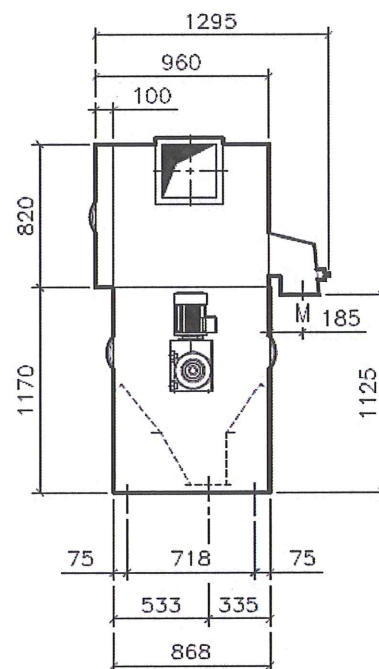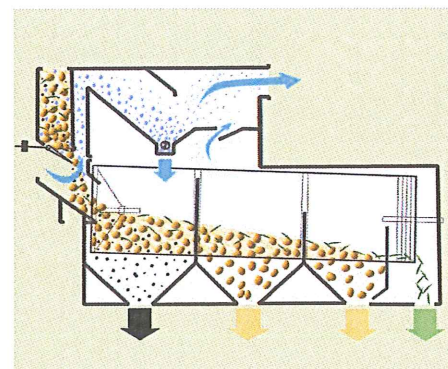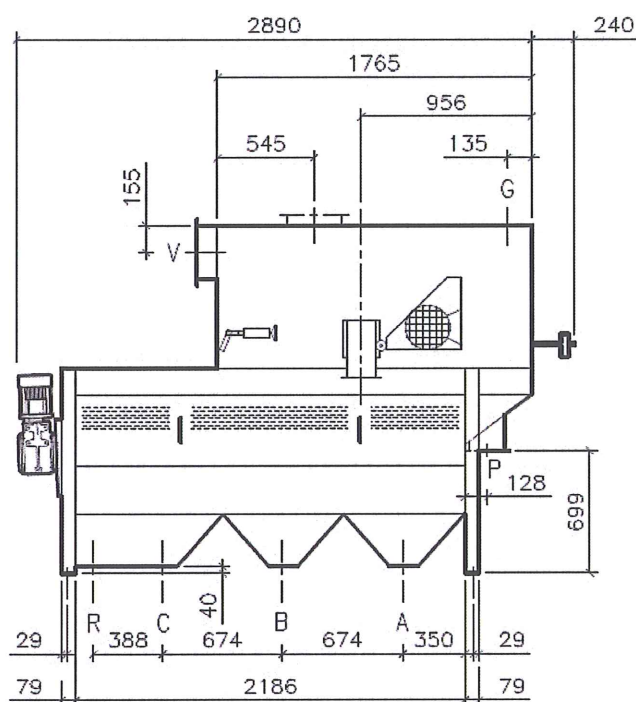

### INLETS and OUTLETS

G - R - P: 200 x 200  
A - B - C - M: 160 x 160  
V: 310 x 310

As we are constantly engaged in an effort to improve the quality and efficiency of our products, dimensions and specifications could change without notice