


CLEANER GRADER

Type EAC 3003VP

MAROT[®]

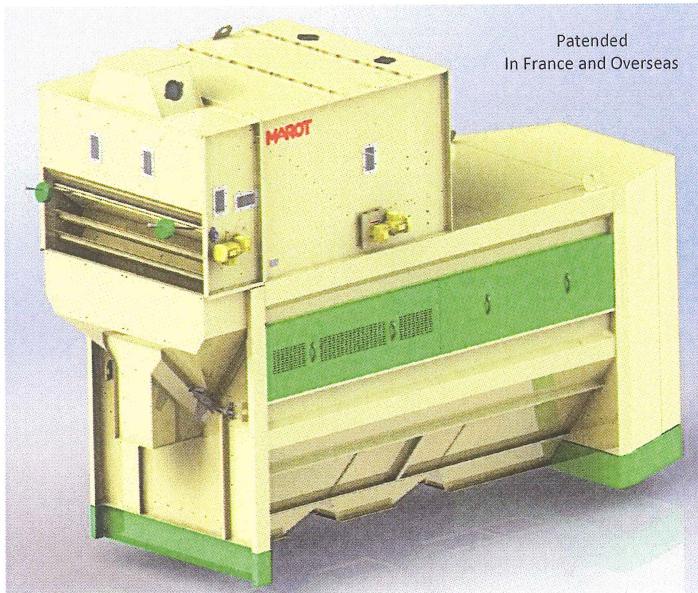


**UNIVERSAL
IN APPLICATION**

EXAMPLE FOR WHEAT:

Pre-cleaning : up to 300 t/h
Cleaning : up to 250 t/h
Grading (barley) : up to 30 t/h

VIBRATION FREE OPERATION

- * **Large intake hopper** ensuring optimum product distribution
- * **Very powerful, adjustable aspiration system** operating on the entering the rotary drum (not delivered)
- * **Large aspiration chamber** where the heavier and light trash are separated
- * **Aspiration regulation system (patented)** enabling the aspiration power to be varied precisely without modifying the fan discharge power
- * **A secondary aspiration system (patented)** absorbs the dust generated during screening operations
- * **Efficient dust evacuation system**, constant regardless of aspiration setting
- * **High precision grading**
- * **Rotary drum** fitted with our patented system of spreader and scoop blades
Variable drum angle and variable speed
- * **Removable screens** separating clean sample from light and heavier trash at high throughput rate
- * **Efficient screen anti-blinding system**

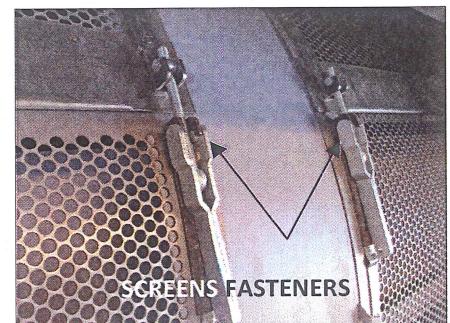






TECHNICAL SPECIFICATIONS

- Reference EAC 3003VP: 95114
- 1610 mm diameter rotary with 3 screens (990 x 5050) to choice
- Motor with aspiration system: drum 11 kW
- Feeding roll: 0.37 kW
- Waste screw: 0.37 kW
- Net weight: machine: 4700 kg
- Option: automatic driving

ATTACHMENTS and ACCESSORIES

consult us

DIMENSIONS IT 1018-05

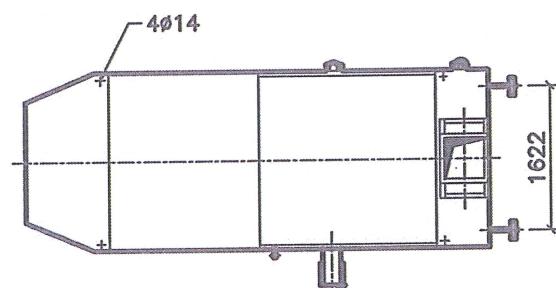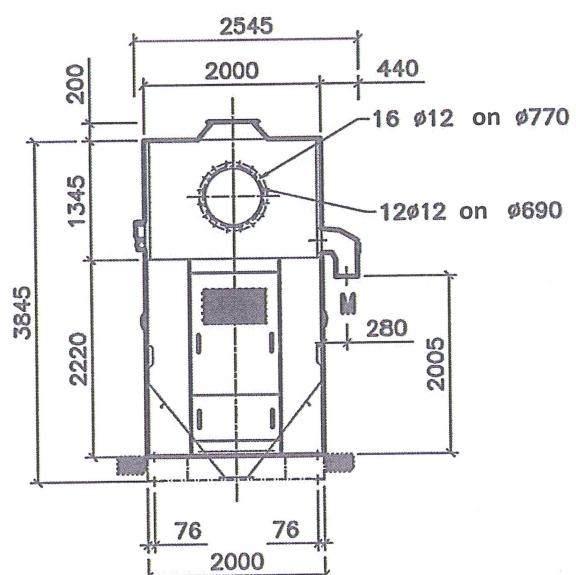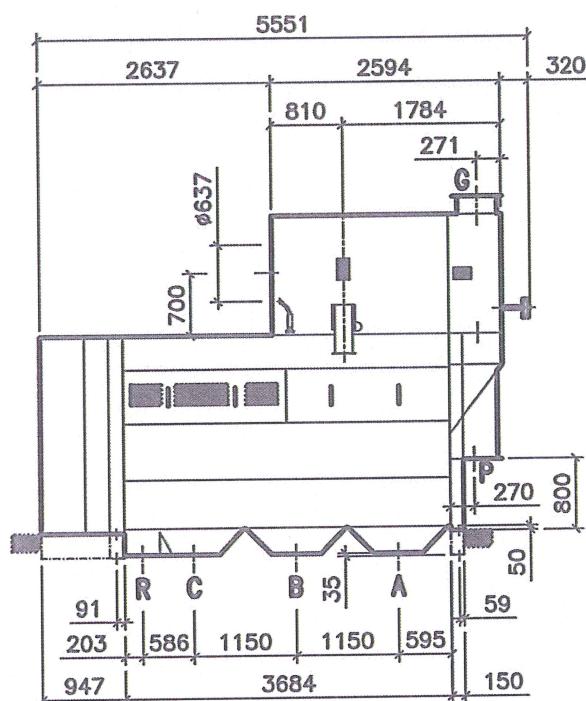

INLETS and OUTLETS

- A - B - C: 500 x 270
G: 450 x 450
M: 250 x 250
P: 360 x 360
R: 316 x 270

As we are constantly engaged in an effort to improve the quality and efficiency of our products, dimensions and specifications could change without notice.