

PRE-CLEANERS



Type PN 2004

MAROT®

UNIVERSAL APPLICATION

CAPACITY WET MAIZE : pre-cleaning 200 t/h
CAPACITY WHEAT, BARLEY : pre-cleaning 250 t/h

- * Simple and fast installation
 - * Easy maintenance
 - * According ATEX rules
(zone 21)
 - * No vibration
 - * 1260 Ø Rotary drum with efficient screen de-blinding system
 - * Quick and easy screen changing
 - * Variable drum angle, electronic variator and variable speed
 - * The pre-cleaner removes large impurities from the product prior to storage or drying. Grains pass through the screens and large impurities remain inside the drum and exit at the end.
- Easily incorporated into new or existing systems.
- * Changing screens allows the machine to be used for grading (at reduced throughput).

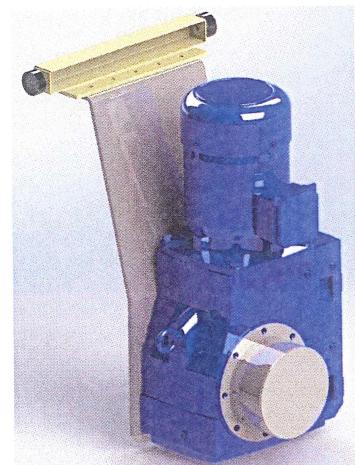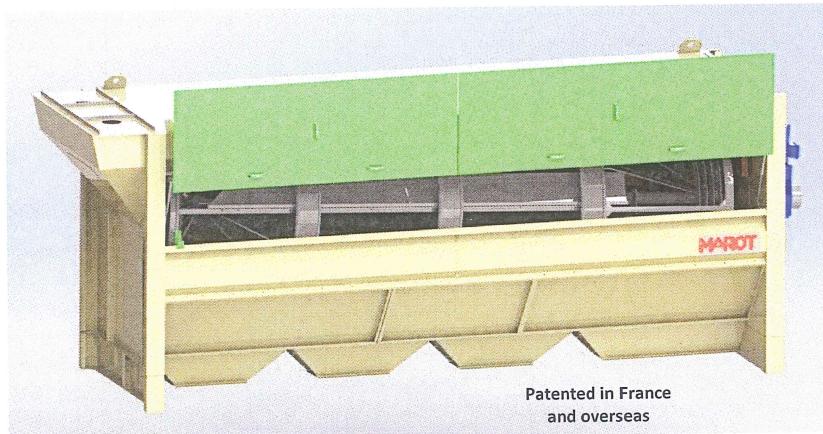


Complete motorization



TECHNICAL DATA

- Reference PN 2004VP: 98016
- 1260 mm diameter rotary drum with 4 screens (990 x 4000) to choice
- Drive power: 4 kW
- Net weight: machine: 2260 kg




Functioning

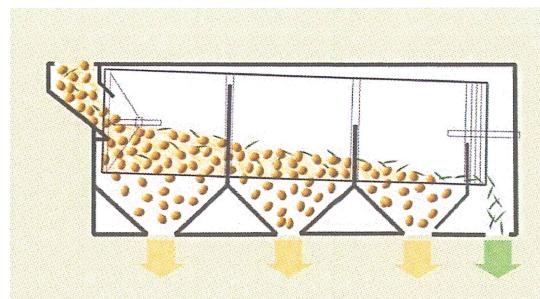

ATTACHMENTS and ACCESSORIES

consult us

DIMENSIONS IT 737 - 08

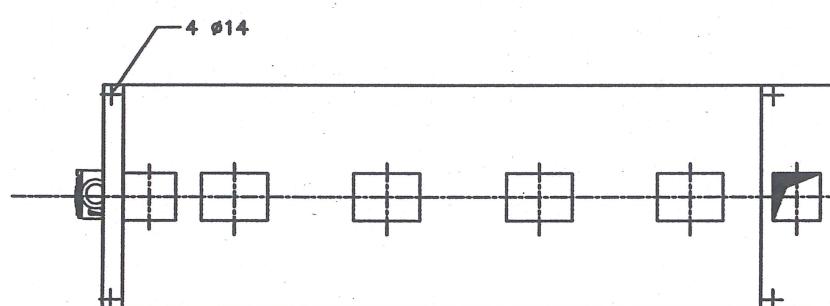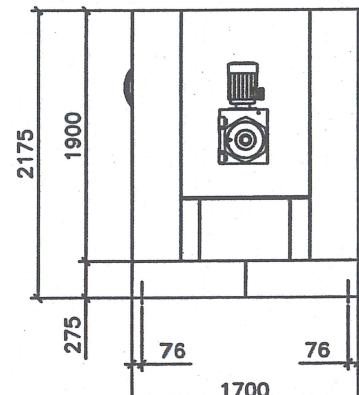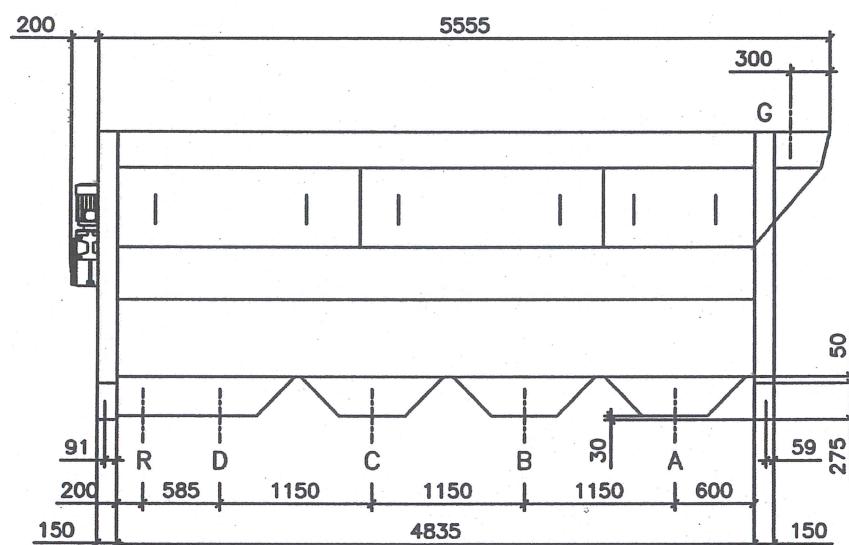

INLETS and OUTLETS

A - B - C - D: 270 x 360
G: 360 x 360
R: 270 x 363

As we are constantly engaged in an effort to improve the quality and efficiency of our products, dimensions and specifications could change without notice.